

DSTS SERIES DYNAMIC DRIVE SHAFT TORQUE SENSOR



KA Sensors offers a fully custom service to fit a wireless Dynamic Torque Measuring Sensor to a drive shaft.

Available to both race teams and race car manufacturers the sensor can be designed, manufactured, calibrated and supplied to fit to a wide range of Drive Shaft Diameters.

Having quickly understood customers' requirements, we will prepare the supplied shaft to have the Strain Gauging bonded on to it. By using leading edge Strain Gauging techniques and smart amplifiers we are able to measure, amplify and correct temperature errors in one compact assembly. The whole assembly is then fitted with a wireless transmitter with a built in long-life battery pack, along with a robust receiver unit.

Every sensor is tested and issued with traceable calibration certification before shipping.

With over 30 years of sensor design experience, we are able to offer sensor solutions for almost any application.

TECHNICAL SPECIFICATIONS

	1		
Range	±250Nm to ±10000Nm or ±180Lbft to ±7500Lbft		
Safe Over Range	150% of Range		
Linearity	±0.25% FS		
Wireless Signal	2.4Ghz Radio Up to 12 channels - encrypted (Range 5M)		
Housing Materials	Sensor/Transmitter: Nylon Receiver: Nylon		
Sensor Supply	3.6V Internal Battery (> 200Hrs Dependant on the Sample Rate Selected) Current draw 40mA		
Transmission Rate	800Hz		
Operating Temperature Range	-20°C to +85°C (0 to +190°F)		
Electrical Connection	Deutsch ASX Connector		
Receiver Supply Voltage	5V to 16V		
Receiver Output	0.5 –4.5V with 2.5V offset		
Protection Class	IP65		
Options	Amplifier, Connector Fitting and Labelling		

KA Sensors adopts a continuous development program which sometimes necessitates specification changes without notice.

Sensors For Motorsport

Features

- 0 to ±10000Nm
- Wireless Output
- Internal 3.6V Battery
- Various Shaft Sizes
- Full Custom Design

Applications


- Input Shafts
- Half Shafts
- Steering

kasensors.com sales@kasensors.com +44(0)1476 568057

DSTS 10.18

PRESSURE | TEMPERATURE | FORCE | TORQUE | POSITION | SPEED | ACCELERATION | GYRO

TRANSMITTER — MECHANICAL DETAILS

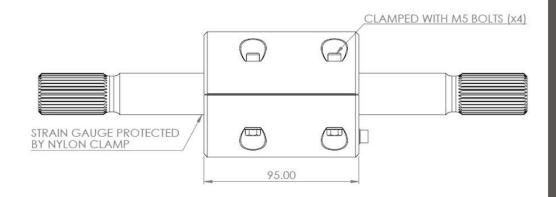


SHAFT DIAMETER + 2INCHES (50MM)


Sense Analyse Control

Services for:

- Data Logging
- Telemetry
- Controls
- Wiring

RECEIVER — MECHANICAL DETAILS

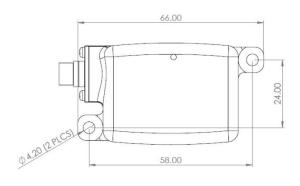



Contact us

KA Sensors Ltd Unit 14 & 15

The Old Malthouse

Springfield Road

Grantham

NG31 7BG

Lincolnshire

United Kingdom

CONNECTION DETAILS

+Ve Supply	OV Supply	Signal	RX	TX
Pin 1	Pin 2	Pin 3	Pin 4	Pin 5

kasensors.com sales@kasensors.com +44(0)1476 568057

DSTS 10.18