Ka sense analyse control

KAA3 Series Triaxial Accelerometer

The KAA3 Series of Miniature Accelerometers offer a compact and robust solution for the motorsports and automotive testing industry.

The sensor offers 3 Axis of measurement with integral signal conditioning to give a standard signal of 0.5 to 4.5V; ideal for most data acquisition systems.

Supply voltage can be 5V or 8-16V with low current consumption of less than 25mA.

With a bandwidth of zero to 1500Hz, these sensors are useful for applications within component, full vehicle testing and development programs.

TECHNICAL SPECIFICATIONS

Range (g)	Standard Ranges: 2, 5, 10, 20, 50, 100, 200		
Bandwidth	Ranges 2-10g: 0-1500Hz Ranges 20-200g: 0-400Hz		
Resonant Frequency	5kHz		
Safe Over Range	±4000g		
Accuracy	<±0.3% FS Linearity		
Cross Axis Sensitivity	<±2% FS (±5% for >20g)		
Thermal Effects	Zero $\pm 0.03\%$ FS/°C (Sensitivity $\pm 0.03\%$ of Reading /°C)		
Output	0.5V to 4.5V (Offset 2.5V)		
Supply	5V (±0.5V) Ratiometric or 8-16Vdc		
Operating Temperature Range	-55°C to +125°C		
Compensated Temperature Range	0°C to +100°C		
Noise	>15mg√Hz		
Construction	Anodised Aluminium		
Electrical Connection	50cm, 55Spec, 26AWG Cable + DR25 Sleeve		
Protection Class	IP66		
EMC Protection	EN 50082-1		
Weight	30g (Excluding Cable)		
Options	Connector Fitted and Part Number Labelling		

Sensors For Motorsport

Features

- Miniature Size
- ±2g to ±200g
- 3 Axis Outputs
- DC Response
- Rugged Design
- Built-In Amplifier

Applications

- Structural Analysis
- Aero Performance
- Suspension Test
- //Launch Control
- Braking


kasensors.com sales@kasensors.com +44(0)1476 568057

KAA3 10.18

KA Sensors adopts a continuous development program which sometimes necessitates specification changes without notice.


PRESSURE | TEMPERATURE | FORCE | TORQUE | POSITION | SPEED | ACCELERATION | GYRO


PART NUMBER CONFIGURATOR

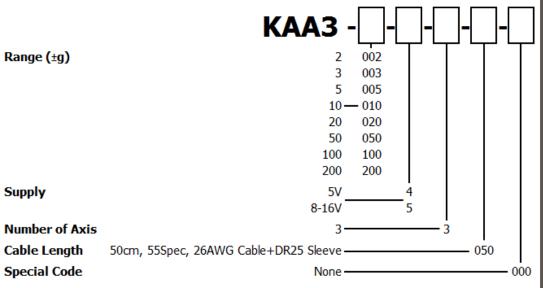

The KA configuration tool is used to specify a standard KA Sensor, other options are available.

MECHANICAL DETAILS



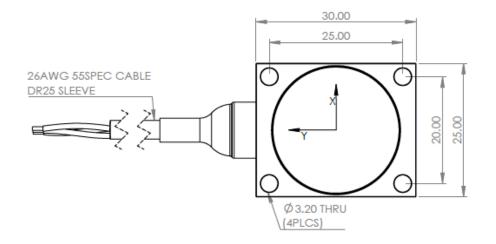

CONNECTION DETAILS

+Ve Supply	0V Supply	Output (X)	Output (Y)	Output (Z)
Red	Black	White	Blue	Green

ENGINEERING LED | CONFIDENTIAL | EXPERIENCED | RESPONSIVE | DYNAMIC | FRIENDLY

Sense Analyse Control

Services for:

- Data Logging
- Telemetry
- Controls
- Wiring

Contact us

KA Sensors Ltd Unit 14 & 15 The Old Malthouse Springfield Road Grantham Lincolnshire United Kingdom NG31 7BG

kasensors.com sales@kasensors.com +44(0)1476 568057

KAA3 10.18